


X3-M50-2



| Camera Head | | Suitcase | | Control Box | |
|------------------------------|----------------------------------|-----------------------|--|---------------------------------------|--------------------------------|
| Camera size: | ø50mm*L160mm | Size: | L511*W430*H200mm | Work supply: | DC 12V |
| Sensor size: | 1/3 inch CCD | Material: | Engineering plastics | Storage medium: | SD card & USB stick (max 256G) |
| View angle: | 90° | Charger | | DVR Total Pixels: | 720X576 (D1) |
| Camera light: | 6pcs highlight LEDs | Input: | AC100~240V / 50~60Hz | Video record(mp4) & picture snap(jpg) | |
| Rotatable: | horizontal 360° vertical 180° | Output: | DC 12.6V / 1000MA | 10 levels digital zoom | |
| Resolution: | 960 TVLine | DC plug diameter: | 2.1mm | Microphone Audio record | |
| Glass material: | Sapphire glass | Keyboard | | Stereo earphone output | |
| Shell material: | Aluminum alloy & stainless steel | Size: | L220*W118*H19.2mm | Digital clock & digital calendar | |
| Focus distance: | 70mm-1m | Language: | English | Monitor | |
| Cable Wheel | | Interface: | USB port | Monitor size: | 9 inch TFT |
| Wheel size: | 768L*369W*820Hmm | Text edit line: | PAL 27letter 12line NTSC 27letter 9line | Monitor pixels: | 800X480 |
| Cable material: | Fiberglass rod | Edit page: | 4 pages | OSD language: | English |
| Cable length: | 60m~120m | Skids | | Monitor image reversible | |
| Cable diameter: | ø9.5mm, 9 cores | Skid -1/ -2/ -3 | ø110 / ø150 / ø220mm | Monitor model: | 16:9&4:3 |
| Wheel material: | Stainless steel | Li-ion Battery | | Sunshade include | |
| Meter counter & handle-brake | | Battery capacity: | 4400MAH | Controller | |
| Counter accuracy: | 0.1m | Work supply: | 12.6V | Size: | 32*83*166mm |
| Fiberglass color: | Yellow | Charge time: | 5 hours | Powersupply: | DC12V |
| | | Protective voltage: | 9.3V | Waterproof: | IP65 |
| | | Work time: | ≥420minutes | | |

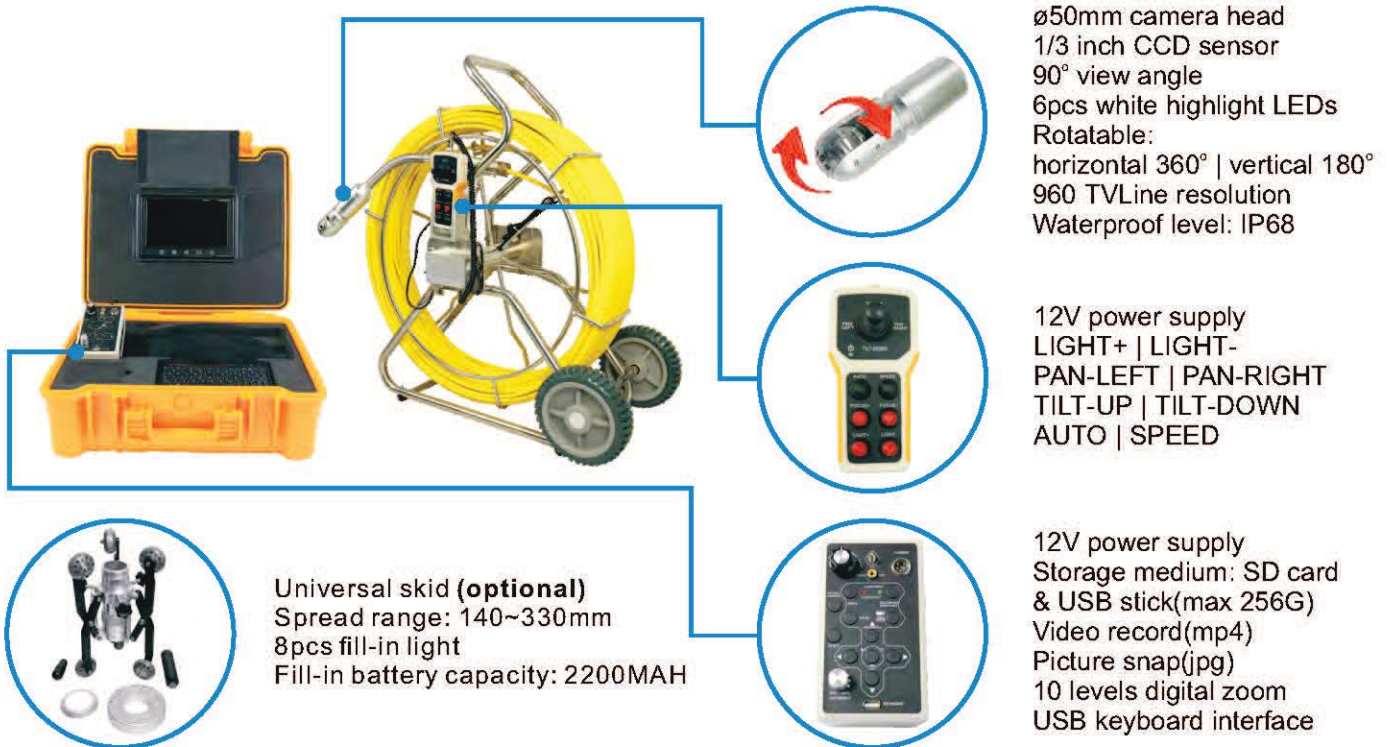